

110/539382

Rec'd PCT/PTO 15 JUN 2005

PCT/IB-03 / 05762


02.12.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02080505.7

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

Best Available Copy



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Anmeldung Nr:  
Application no.: 02080505.7  
Demande no:

Anmeldetag:  
Date of filing: 20.12.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

DC/AC converter for supplying two gas discharge lamps

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H05B41/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

DC/AC converter for supplying two gas discharge lamps

EPO - DG 1

20 12 2002

(68)

The invention relates to a DC/AC converter for supplying two gas discharge lamps, comprising a pair of input terminals for supplying a DC voltage, a first series circuit interconnecting the input terminals, comprising a first switching element and a second switching element, a second series circuit interconnecting the input terminals, comprising a third switching element and a fourth switching element, a third series circuit interconnecting the input terminals, comprising a first capacitor and a second capacitor with substantially equal capacitance, a first gas discharge lamp connected between the junction between the first and the second switch element and the junction between the two capacitors, a second gas discharge lamp connected between the junction between the third and the fourth switch element and the junction between the two capacitors, wherein an inductor is connected in series with each of the lamps and a control circuit for controlling the first to fourth switch elements, and which is adapted to avoid the simultaneously conducting of the first and second switch elements the third and the fourth switch elements respectively.

Such a DC/AC converter is disclosed in EP-A-0 395 159.

Although this prior art converter is primarily adapted to supply TL-lamps it is also suitable to supply high pressure gas discharge lamps (HID-lamps).

Particularly in the field of HID lamps there exists the need to control the power fed to the lamps, not only for the control of the light output but primarily to be able to start this kind of lamps. Here it is noted that the 'take over' of said lamps between the ignition and the steady state usually requires special provisions. With the ability to control the power supplied to the lamp, starting of the lamp only requires a special ignition circuit.

Thus there exists a wish to provide lamps with a variable controllable power.

The aim of the invention is to provide such a DC/AC converter of the kind mentioned above of which the power supplied to the lamps can be controlled.

This aim is reached in that the control element is adapted to control the conducting periods of the switches with a duty cycle which is variable.

As stated before, the control of the power supplied to the lamps is important, in particular for the starting of the lamp. By control of the conducting periods of the switch elements a proper control of the energy supplied to the lamps is obtained. Of course care should be taken to avoid the simultaneous closure of the first and second switch elements and of the third and fourth switch elements to avoid short circuits.

Although control of the power by amending the duration of the switched on times is known per se, it is supposed to be novel in the field of double bridges wherein tuned circuits are present.

According to a preferred embodiment, the control unit is adapted to control the duty cycle of the first and second switch elements simultaneously and to control the duty cycle of the third and fourth switch elements simultaneously.

This facility offers the possibility of independent control of the power supplied to each of the lamps. This is not only important for control of the light output of the lamps, but also for the starting procedure. It is conceivable that both lamps present in the circuit have more or less different properties, so that ignition of one lamp may take place earlier than ignition of the other lamp. By the independent control of the power supplied to each of the lamps, the 'take over' from the ignition to the steady state is adaptable to the processes taking place in each of the lamps.

When using HID lamps acoustical resonance may lead to destruction of the lamp. As for lamps of the most common types acoustical resonance often takes place in the frequency bands between 300Hz and 1000Hz, it is attractive to avoid those frequencies.

Therefore a preferred embodiment provides the feature that the control unit is adapted to control the switches with a frequency in the band between 140Hz and 170Hz.

According to another preferred embodiment a series circuit of an inductor and a diode is connected between the input terminal and the first switching element, wherein a fifth switching element is connected between the junction of the diode and the inductor and the second input terminal and the fifth switch element is controlled by the control circuit.

This circuit provides an extra control for the voltage to be supplied to the double bridge circuit. This extra control function may be used for keeping the voltage supplied to the double bridge as constant as possible, for instance in the case of a varying supply voltage.

A last preferred embodiment teaches the feature that the frequency of the switching of the fifth switch element is at least an order of magnitude higher than that of the

frequency of the first to fourth switching elements. This avoids mutual interference of both power conversion systems.

Subsequently the present invention will be elucidated with the help of the  
5 drawing, showing a diagram of a converter according to the present invention.

The converter 1 comprises a double bridge circuit 2 with four switch elements  
3, 4, 5, 6, which may be formed by FETs, GTOs or other controllable semiconductor switch  
elements. The junctions between the switch elements 3, 4 and 5, 6 respectively are connected  
10 to a pair of HID lamps 7, 8 connected in series.

The double bridge circuit comprises a first input 9 connected to the positive  
power supply and a second input 10 connected to ground.

A first capacitor 11 is connected between the first input 9 and the junction  
between the HID lamps 7, 8 and a second capacitor 12 is connected between the second input  
15 10 and the junction between the HID lamps 7,8. In series with each of the lamps 7,8 an  
inductor 13, 14 respectively is connected.

Each of the switch elements 3, 4, 5, 6 is controlled by a control circuit 15. The  
circuit as described so far functions as is described in the above referenced EP-A-0 395 159.

However the present circuit is especially adapted to supply HID lamps which  
20 are prone to acoustical resonance, and which may lead to destruction of the lamps. To avoid  
this phenomenon, the control circuit is adapted to control the switch elements with a  
frequency wherein acoustic resonance does not take place. This implies that frequencies  
between 500 Hz and 1000 Hz, are avoided as it is in those frequency bands that HID lamps of  
common types are most prone to acoustical resonance. Of course it is possible to use higher  
25 frequencies, for instance above 1000 Hz, the more as this would lead to smaller sizes of the  
components, but this may lead to unwanted emitting of signals interfering with  
communication systems operating in those frequency bands.

The voltage of power supply may be subjected to fluctuations, which, without  
further measures, may lead to fluctuations of the light flux emitted by the HID lamps 7,8.

30 To avoid those fluctuations the converter according to the present invention  
provides a voltage stabilizing circuit 16, which is connected between the power supply  
connection and the inputs of the double bridge circuit. The voltage stabilizing circuit  
comprises an inductor 17 and a diode 18 connected in series between the power supply  
connection and the input of the double bridge circuit. A fifth switch element 19 is connected

between the junction between the inductor 17 and the diode 18 and ground. The fifth switch element 19 is also controlled by the control circuit 15. Just as the first to second switch elements 3-6, the fifth switch element 19 is be formed by a controlled semiconductor.

5 By controlling the duty cycle of the switch element 19, the voltage level at the input of the double bridge circuit can be stabilized. Herein it is important to choose the frequency of the fifth switch element such that mutual interference with the double bridge circuit is avoided. Therefore a frequency at least one order of magnitude higher than of the double bridge circuit is chosen.

10 It will be clear that the semiconductor switch elements will be provided with a by pass diode to avoid undue voltage stress on the junction of the semiconductor switch element, if the construction of such switch element makes this appropriate.

It will also be clear to a skilled man that numerous amendments can be made to the described embodiment without departing from the scope of the invention.

## CLAIMS:

20 12 2002

(68)

1. DC/AC converter for supplying two gas discharge lamps, comprising:
  - a pair of input terminals for supplying a DC voltage;
  - a first series circuit interconnecting the input terminals, comprising a first switching element and a second switching element;
  - 5 - a second series circuit interconnecting the input terminals, comprising a third switching element and a fourth switching element;
  - a third series circuit interconnecting the input terminals, comprising a first capacitor and a second capacitor with substantially equal capacitance;
  - a first gas discharge lamp connected between the junction between the first and the second switch element and the junction between the two capacitors;
  - 10 - a second gas discharge lamp connected between the junction between the third and the fourth switch element and the junction between the two capacitors;
  - wherein an inductor is connected in series with each of the lamps; and
  - control circuit for controlling the first to fourth switch elements, and which is adapted to avoid the simultaneously conducting of the first and second switch elements, the third and the fourth switch elements respectively,
  - 15 characterized in that the control element is adapted to control the conducting periods of the switches with a duty cycle which is variable.
- 20 2. DC/AC converter as claimed in claim 1, characterized in that the control unit is adapted to control the duty cycle of the first and second switch elements simultaneously and to control the duty cycle of the third and fourth switch elements simultaneously.
3. DC/AC converter as claimed in claim 1 or 2, characterized in that the control unit is adapted to control the switch elements with a frequency in the band between 140 Hz and 170 Hz.
- 25 4. DC/AC converter as claimed in claim 1, 2 or 3, characterized in that between the input terminal and the first switching element a series circuit of an inductance and a diode

is connected, wherein a fifth switching element is connected between the junction of the diode and the inductor and the second input terminal and the fifth switch element is controlled by the control circuit.

- 5 5. DC/AC converter as claimed in claim 4, characterized in that the frequency of the switching of the fifth switch element is at least an order of magnitude higher than the frequency of the first to fourth switching elements.



## ABSTRACT:

20 12 2002

(68)

The invention relates to a DC/AC converter for supplying two gas discharge lamps, comprising a double bridge configuration of four switch elements, a third series circuit interconnecting the input terminals comprising a first capacitor and a second capacitor with substantially equal capacitance, a first and a second gas discharge lamp connected to the bridge configuration, wherein an inductor is connected in series with each of the lamps and a control circuit for controlling the switch elements and which is adapted to control the conducting periods of the switches with a duty cycle which is variable.

By control of the conducting periods of the switch elements a proper control of the energy supplied to the lamps is obtained. Of course care should be taken to avoid the simultaneous closure of the first and second switch elements and of the third and fourth switch elements to avoid short circuits.

Fig. 1

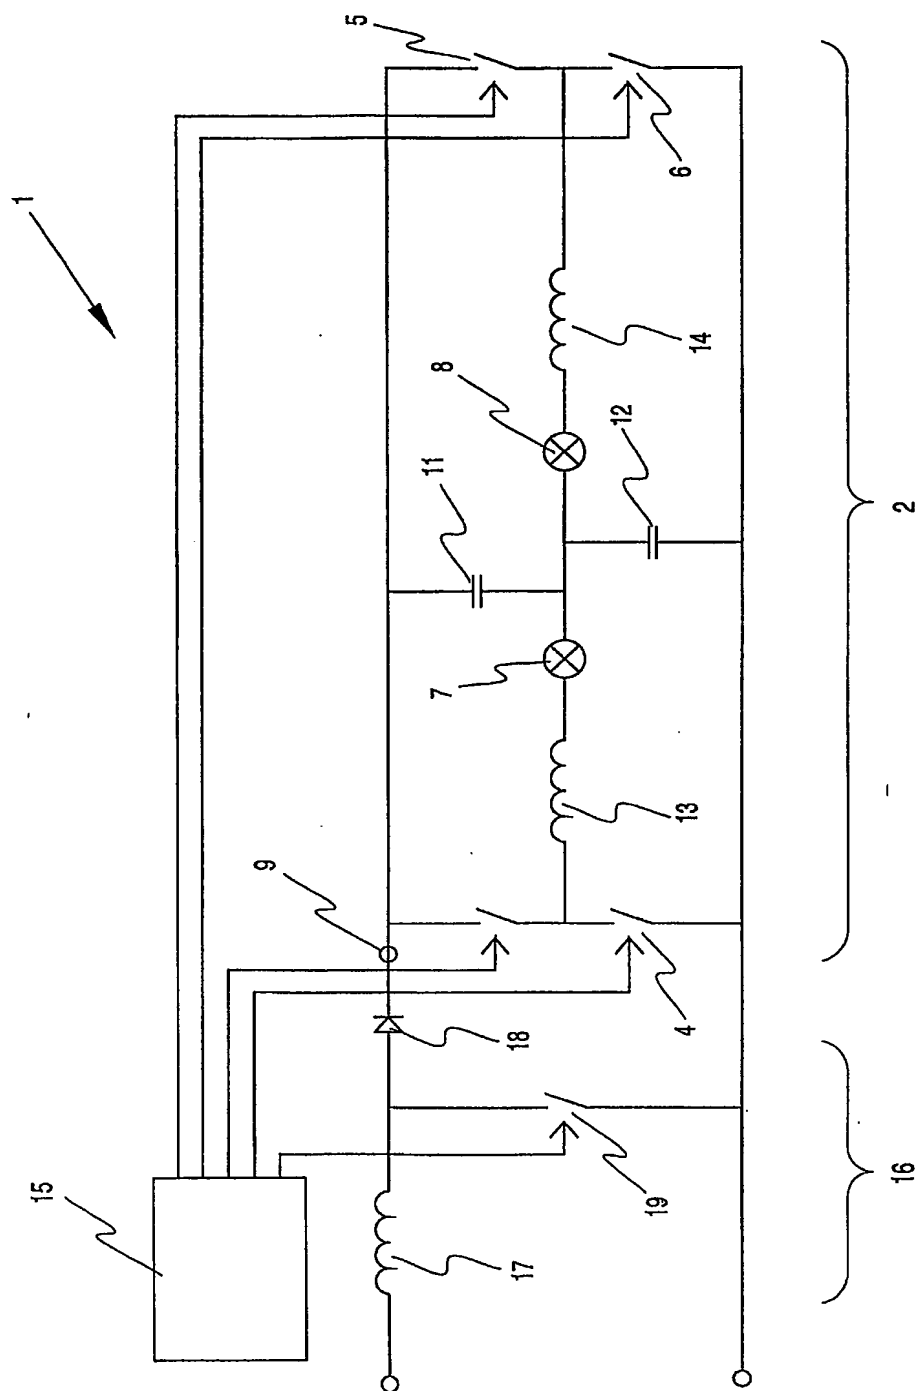


FIG. 1

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**